




EVIS EXERA III GASTROINTESTINAL VIDEOSCOPE



Ultra-slim design with electrosurgery compatibility and outstanding image quality

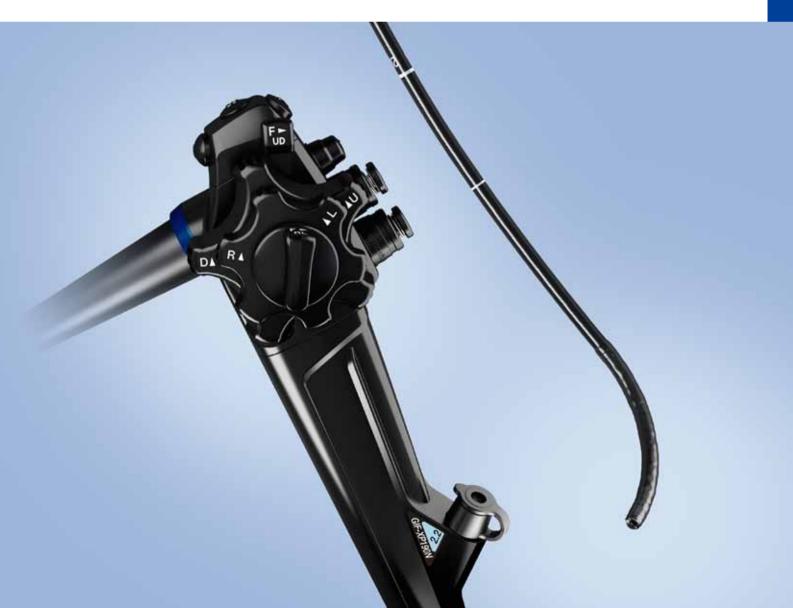

OLYMPUS GIF-XP190N




Ultra-slim Design

The 5.4 mm outer diameter of the distal end helps ease insertion. The shape of the scope tip is carefully formed for smooth removal and is designed to reduce patient discomfort.

Enhanced Image Quality

When used with the EVIS EXERA III platform, the two light guides in the GIF-XP190N increases brightness for more detailed observation as well as reducing shadows from devices.





White Light

NBI

Larger Channel Size

The new channel size of 2.2 mm increases suction volume and allows for a greater variety of device options.

Wider Angles

The viewing angle of this ultra-slim scope has been increased to 140 degrees, matching the wide field of view of larger gastroscopes even in restricted spaces.

Waterproof One-touch Connector

A new connector design minimizes the effort required for setup prior to and in between cases. In addition, it is fully submersible and eliminates the need for a water-resistant cap and the associated risk of an expensive repair due to accidental immersion.





| | Field of view | 140° |
|-------------------|--------------------------------------|------------------|
| Optical System | Direction of view | Forward viewing |
| | Depth of field | 3-100 mm |
| | Distal end outer diameter | 5.4 mm |
| Insertion Section | Distal end enlarged | |
| | Air/Water Nozzle | Light Guide Lens |
| | Right Objective Lens | Left |
| | Down | |
| | Insertion tube outer diameter 5.8 mm | |
| | Working length | 1100 mm |

| | Channel inner diameter | 2.2 mm |
|--------------------|--|----------------------------|
| Instrument Channel | | 2.2 11111 |
| | Minimum visible distance | 3.0 mm from the distal end |
| | Direction endoscopic devices enter and exit the endoscopic image | |
| Bending Section | Angulation range | Up 210° |
| | | Down 90° |
| | | Right 100° |
| | | Left 100° |
| Total Length | 1420 mm | |
| Compatible EVIS | Video System Center OLYMPUS CV-190 | |
| EXERA System | Xenon Light Source OLYMPUS CLV-190 | |
| | | |

Specifications, design, and accessories are subject to change without any notice or obligation on the part of the manufacturer. Olympus is a registered trademark of Olympus Corporation, Olympus America Inc., and/or their affiliates.



OLYMPUS AMERICA INC. 3500 Corporate Parkway, PO Box 610, Center Valley, PA 18034 For more information, contact your local Olympus sales representative, or call 800-848-9024. www.olympusamerica.com

©2012 Olympus America Inc. All rights reserved. Printed in the USA OAIGI1112BRO10189